

• • , • • • • •

[1...3].

: -
 , -

()

• 1, u_{as}, u_{bs}, u_{cs} -
 i_{as}, i_{bs}, i_{cs} - ; u_1, u_2 -
 ; , , , , z -

[4]

[5]

- , :

$$\begin{cases}
\underline{U}_s = \underline{I}_s R_s + \frac{d\underline{\Psi}_s}{dt}; \\
0 = \underline{I}_r R_r + \frac{d\underline{\Psi}_r}{dt}; \\
u_0 = i_0 R_0 + L_0 \frac{di_0}{dt}; \\
M = \frac{3}{2} \text{Im} \left[\underline{I}_s \underline{\Psi}_s^* \right],
\end{cases} \quad (1)$$

$\underline{U}_s, \underline{I}_s, \underline{I}_r, \underline{\Psi}_s, \underline{\Psi}_r$ - s -
 r , r ; R_s, R_r -
 L_0, R_0 -
 i_0 ; -
 u_0 -
 i_0 .

(. 1)

$$\begin{cases}
i_{as} = -i_{bs} = -i_{cs}; \\
u_{as} - u_{bs} - u_{cs} = u_1.
\end{cases}$$



$i_s + i_0 = 0,5\sqrt{3}i_{\beta s} - i_0 + 0,5i_{\alpha s} = 0,5i_{\alpha s} - 0,5\sqrt{3}i_{\beta s} - i_0$;
 $(u_{\alpha s} + u_0) + (0,5u_{\alpha s} + 0,5\sqrt{3}u_{\beta s} - u_0) + (0,5u_{\alpha s} - 0,5\sqrt{3}u_{\beta s} - u_0) = u_1$.

$$\begin{cases}
i_{\alpha s} = -4i_0; \\
u_{\alpha s} = 0,5(u_1 + u_0); \\
i_{\beta s} = 0.
\end{cases}$$

$$\begin{cases}
\underline{I}_s = -4i_0; \\
\underline{U}_s + \underline{U}_s^* = u_1 + u_0.
\end{cases} \quad (2)$$

(2) (1),

$$\begin{cases}
(u_1 + u_0) = \left(\underline{I}_s + \underline{I}_s^* \right) R_s + \frac{d \left(\underline{\Psi}_s + \underline{\Psi}_s^* \right)}{dt}; \\
0 = \underline{I}_r R_r + \frac{d\underline{\Psi}_r}{dt}; \\
u_0 = -\frac{1}{4} R_0 \underline{I}_s - \frac{1}{4} L_0 \frac{d\underline{I}_s}{dt}; \\
M = \frac{3}{2} \text{Im} \left[\underline{I}_s \underline{\Psi}_s^* \right].
\end{cases}$$

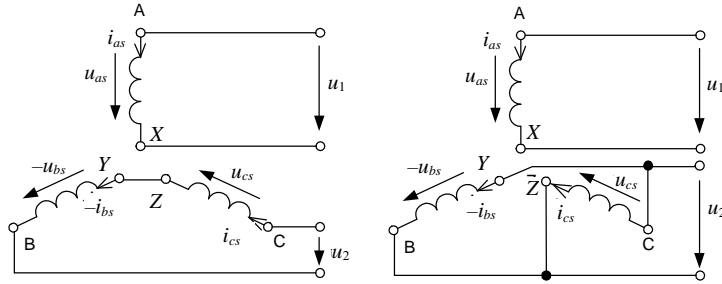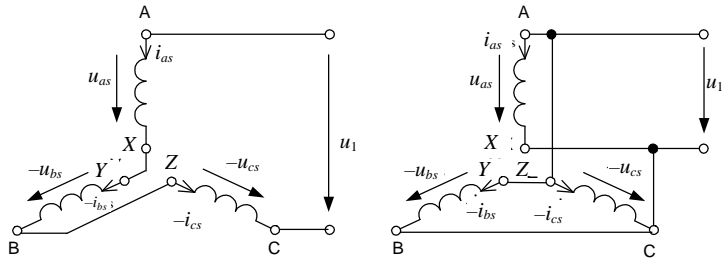

.1. (,) (,)

u_0 , :

$$\begin{aligned}
 u_1 &= \underline{L}_s \left(2R_s + \frac{1}{4}R_0 \right) + \frac{1}{4}L_0 \frac{d\underline{I}_s}{dt} + 2 \frac{d(\underline{\Psi}_s + \underline{\Psi}_s^*)}{dt}; \\
 0 &= \underline{L}_r R_r + \frac{d\underline{\Psi}_r}{dt}; \\
 M &= \frac{3}{2} \text{Im} \left[\underline{I}_s \underline{\Psi}_s^* \right].
 \end{aligned} \tag{3}$$

:

$$\begin{aligned}
 \underline{\Psi}_s &= \underline{L}_s \underline{L}_s + \underline{L}_r M e^{j\xi}; \\
 \underline{\Psi}_r &= \underline{L}_r \underline{L}_r + \underline{L}_s M e^{-j\xi},
 \end{aligned}$$

$$\begin{aligned}
 L_s &= M + L_{s\zeta}; \quad L_r = M + L_{r\zeta} - \\
 &\quad ; \quad , \quad L_{s\zeta}, \quad L_{r\zeta} -
 \end{aligned}$$

$$e^{j\xi}, \quad \xi - \tag{3}$$

$$\left\{ \begin{array}{l} \left(2R_s + \frac{1}{4}R_0\right)i_{\alpha s} + \left(2L_s + \frac{1}{4}L_0\right)\frac{di_{\alpha s}}{dt} + 2M\frac{di_{\alpha r}}{dt} = u_1; \\ R_r i_{\alpha r} + L_r \frac{di_{\alpha r}}{dt} + M \frac{di_{\alpha s}}{dt} + \omega L_r i_{\beta r} = 0; \\ R_r i_{\beta r} + L_r \frac{di_{\beta r}}{dt} - \omega L_r i_{\alpha r} - \omega M i_{\alpha s} = 0; \\ M = -\frac{3}{2}M i_{\alpha s} i_{\beta r}, \end{array} \right. \quad (4)$$

$$+ \frac{1}{4}R_0 \approx 2,25R_s, \quad - 2L_s + \frac{1}{4}L_0 \approx 2M + 2,25L_{s\zeta},$$

$$[6] \quad R_0 \approx R_s; \quad L_0 \approx L_{s\zeta}.$$

$$(4), \quad (\dots 1), \quad 3$$

$$(\dots 1) \quad :$$

$$\left\{ \begin{array}{l} i_{cs} = -i_{bs}; \\ u_{\alpha s} = u_1; \\ u_{cs} - u_{bs} = u_2. \end{array} \right.$$

$$\left\{ \begin{array}{l} (R_s + 0,5R_0)i_{\alpha s} + (L_s + 0,5L_0)\frac{di_{\alpha s}}{dt} + M\frac{di_{\alpha r}}{dt} = u_1; \\ \sqrt{3}R_s i_{\beta r} + \sqrt{3}L_s \frac{di_{\beta r}}{dt} + \sqrt{3}M \frac{di_{\beta s}}{dt} = u_2; \\ R_r i_{\alpha r} + L_r \frac{di_{\alpha r}}{dt} + M \frac{di_{\alpha s}}{dt} + \omega L_r i_{\beta r} + \omega M i_{\beta s} = 0; \\ R_r i_{\beta r} + L_r \frac{di_{\beta r}}{dt} + M \frac{di_{\beta s}}{dt} - \omega L_r i_{\alpha r} - \omega M i_{\alpha s} = 0; \\ M = \frac{3}{2}M (i_{\beta s} i_{\alpha r} - i_{\alpha s} i_{\beta r}) \end{array} \right. \quad (5)$$

$$R_s + 0,5R_0 \approx 1,5R_s,$$

$$L_s + 0,5L_0 \approx M + 1,5L_{s\zeta},$$

$$\sqrt{3} \dots R_s, L_s -$$

$$\dots (\dots 1), -$$

$$\dots (5), -$$

$$\dots 2$$

1. \dots (4), (5)

(\dots 1), - (R_{\alpha r}, R_{\beta r},

L_{\alpha r}, L_{\beta r}, M_{\alpha r}, M_{\beta r}) -

- \dots . 1.

	. 1	. 1	. 1	. 1
R_{\alpha s}	2R_s + \frac{1}{4}R_0	\frac{2}{3}R_s + \frac{1}{12}R_0	R_s + \frac{1}{2}R_0	R_s + \frac{1}{2}R_0
R_{\beta s}	0	0	\sqrt{3}R_s	\frac{\sqrt{3}}{2}R_s
L_{\alpha s}	2L_s + \frac{1}{4}L_0	\frac{2}{3}L_s + \frac{1}{12}L_0	L_s + \frac{1}{2}L_0	L_s + \frac{1}{2}L_0
L_{\beta s}	0	0	\sqrt{3}L_s	\frac{\sqrt{3}}{2}L_s
M_{\alpha s}	2	\frac{2}{3}M		
M_{\beta s}	0	0	\sqrt{3}M	\frac{\sqrt{3}}{2}M

2. [1, 3, 6] -

1. \dots // -
2. \dots - 1972. - 6. - . 43-45.
3. \dots \dots, 1991. - 160 . -
4. // \dots - 1972. - 8. - . 58-61. \dots - \dots
5. \dots, 1980. - 344 . \dots // -
6. \dots - 2001. - 2. - . 33-42. \dots -
7. // \dots - 1953. - 2. -

20.10.2004